

## BOLLARD LIGHT SERIES SPECIFICATION



### Features

- Features a combination of security, style and vandal resistance that lightens pathways beautifully. Special heat dissipation design to achieve optimum efficiency.
- High-shock and high-vibration resistant. Color temperature offering of 3000K(Warm White), 4000K(Natural White) and 5000K(Cool White).
- Green, energy saving, long and reliable life of 50,000 hours.
- Conforms to the strictest approval standards. ETL approved for wet or damp locations.
- Application: Main road, Rural road, commercial square, Garden, Villa, etc...

### Advantage


- Easy and secure installation
- Ideal for Harsh Environment Applications
- Uniformity lighting distribution
- High lumens efficiency and high CRI
- Environmentally friendly with no mercury



**Description**  
 Die-cast Aluminum housing  
 Spinning Aluminum Top Cover  
 Extruded Aluminum pole


**Basic Feature**  
 No: OGLB08  
 E26, Max. 23W PLC  
 Clear PC  
 Class I, IP44

**Light Distribution**

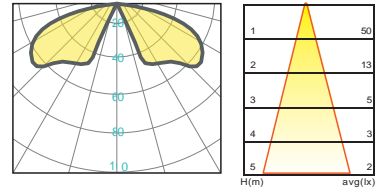

**Bollard Light Series**

**Dimension**

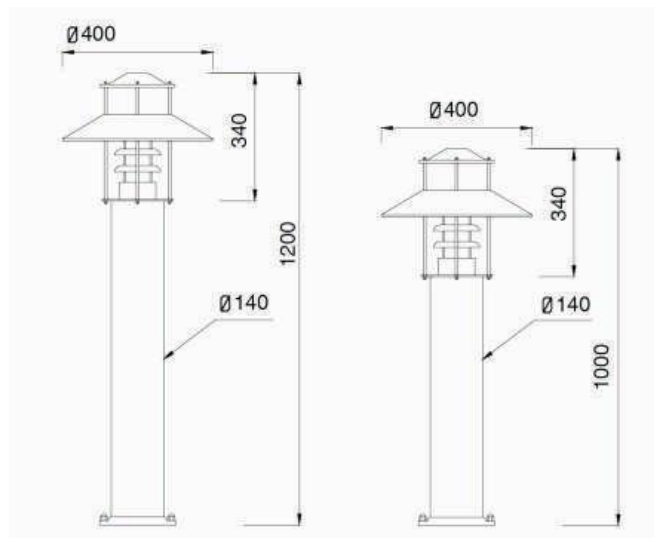

OGLB08-1200

OGLB08-1000