

BOLLARD LIGHT SERIES SPECIFICATION



Features

- Features a combination of security, style and vandal resistance that lightens pathways beautifully. Special
- heat dissipation design to achieve optimum efficiency.
- High-shock and high-vibration resistant. Color temperature offering of 3000K(Warm White), 4000K(Natural White) and 5000K(Cool White).
- Green, energy saving, long and reliable life of 50,000 hours.
- Conforms to the strictest approval standards. ETL approved for wet or damp locations.
- Application: Main road, Rural road, commercial square, Garden, Villa, etc...

Advantage

- Easy and secure installation
- Ideal for Harsh Environment Applications
- Uniformity lighting distribution
- High lumens efficiency and high CRI
- Environmentally friendly with no mercury

Bollard Light Series




Description

Die-cast Aluminum housing
Extruded Aluminum pole

Basic Feature

No: OGLB06- 240
E26, Max. 23W PLC
Clear PC
Class I, IP44


Light Distribution



1	38
2	9
3	4
4	2
5	1

H(m) avg(lx)

Dimension

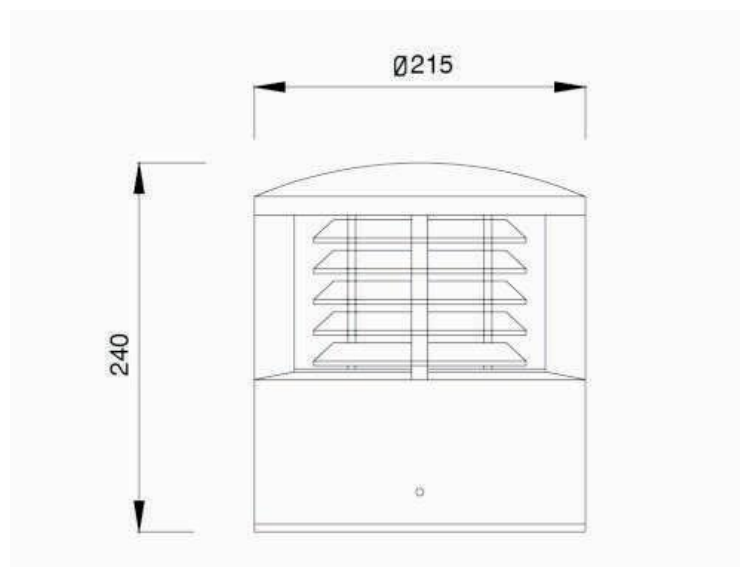

OGLB06-240