


• **Description**

The Hybrid Architectural LED Linear Pendant Light Fixtures' most distinguishing feature is the intense design feeling, has sense of decorative and design, very imaginative and innovative.

It provides ambient, indirect uplighting and direct downlighting with six LED modules, includes two gimbal downlights, two up/down panels and two downlight panels with 6000 lumens total.

It is no flicker, reaching up to 100lm/w, 0-10v dimming with motion sensor and emergency backup optional. The design of this series is ideal for use in architectural application, especially, It is the optimal choice for new construction.

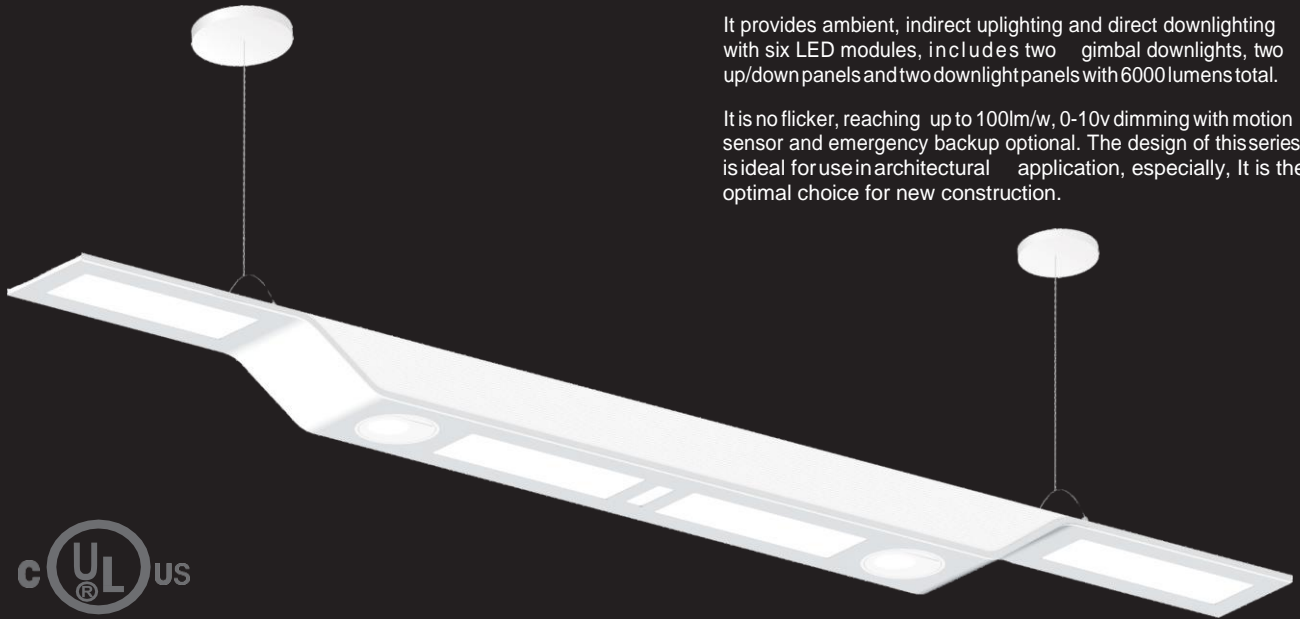

• **Structures**

Indirect uplighting and direct downlighting with six LED modules :

2pcs Up/down Panels

2pcs Downlighting Panels

2pcs Gimbal Downlights with 360°adjustable angle

• **Specification**

Model: AP-60W-XXX

Delivered Light Output: 6000 Lumens (4000K)

Input Power: 60Watts

CRI: Ra>80

CCT: 3000K/4000K/5000K

Input Voltage: 100-277VAC

Input current: 0.51A

THD:<20%

Power Factor: >0.9

Function: Motion sensor and emergency backup available
Standard Warranty: 5 Years

Standard Lifetime: Designed minimum 50,000 hours

Mounting: Suspended

Certificate: UL

