




2FT/4FT Linear High Bay

Basic Data


Product Number	Wattage	Color Temp.	Voltage	Lumens	Warranty	CRI
EX-20W H2YZDA	20	4000K-5700K	100-277/200-480V	2800	5 years	70
EX-30W H2YZDA	30	4000K-5700K	100-277/200-480V	4200	5 years	70
EX-40W H4YZDA	40	4000K-5700K	100-277/200-480V	5600	5 years	70
EX-50W H4YZDA	50	4000K-5700K	100-277/200-480V	7000	5 years	70
EX-60W H4YZDA	60	4000K-5700K	100-277/200-480V	8400	5 years	70

“H2, H4”=Product code, “Y”=D or N:Dimmable or non-dimmable “Z”= CCT, from 4000~5700K “D”=Beam angle, D40 for 40°,D60 for 60°,D90 for 90°, D120 for 120° A for glass info. blank for flat glass, C for spherical glass.

Dimensions

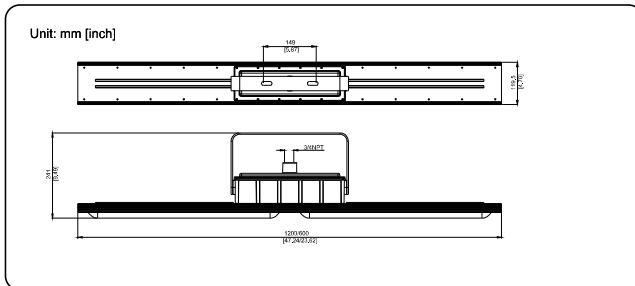

50W/120D

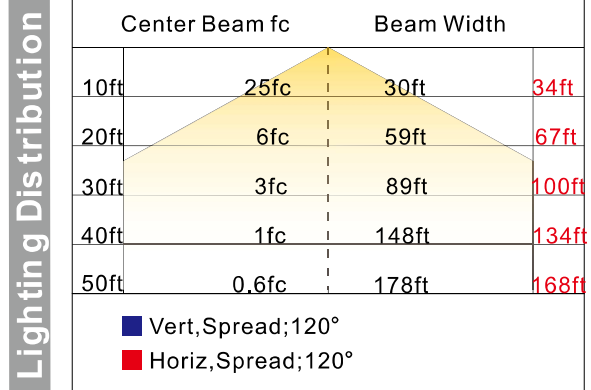

Approvals

Marking Atex	II2 G Ex db IIB T6 Gb II2 D Ex db IIIC T80 Db IP66
Marking IECEX	Ex db IIB T6 Gb Ex db IIIC T80 Db IP66
Marking UL844 <small>(North American)</small>	Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E, F, G Class II, Division 2, Groups E, F, G Class III
Marine Marking	UL 1598A ABS and DNV Type Approved
Other Rating	IP 66 IK 10

Installation

